


东营嘉川商贸有限公司

Dongying Jiachuan Commerce and Trade Co. Ltd
 Add: Dongsi Road, Dongying Economic Zone, Dongying Shandong, China
 Tel:0086 546 757 1882 Email: info@dhfilmtech.com www.dhfilmtech.com

Product Name	PET G Shrink Films		Type	A100
Surface treatment	No		Thickness	30-75 um
Item	Unit	Test Method	Value	
Average thickness tolerance	%	SH method	±2%	
Tensile strength	MD	MPa	ASTM D882	50
	TD			250
Elongation	MD	%		500
	TD			40
Heat Shrinkage	MD	%	100°C/10S	1.5
	TD			77.5
Haze	%	ASTM D1003	4.0	
Transmittance	%		89.0	
Gloss	%	GB/T 8807 (45°)	90	
C.O.F(IN/OUT)	μS/μK	ASTM D1894E	0.50/0.40	
Wetting Tension	mN/m	ASTM D2578	40	
Seaming Strength	N/15mm	1,3 Dioxlane	7.00	
Shelf life	As Storage condition			12 months

Shrinkage Curve

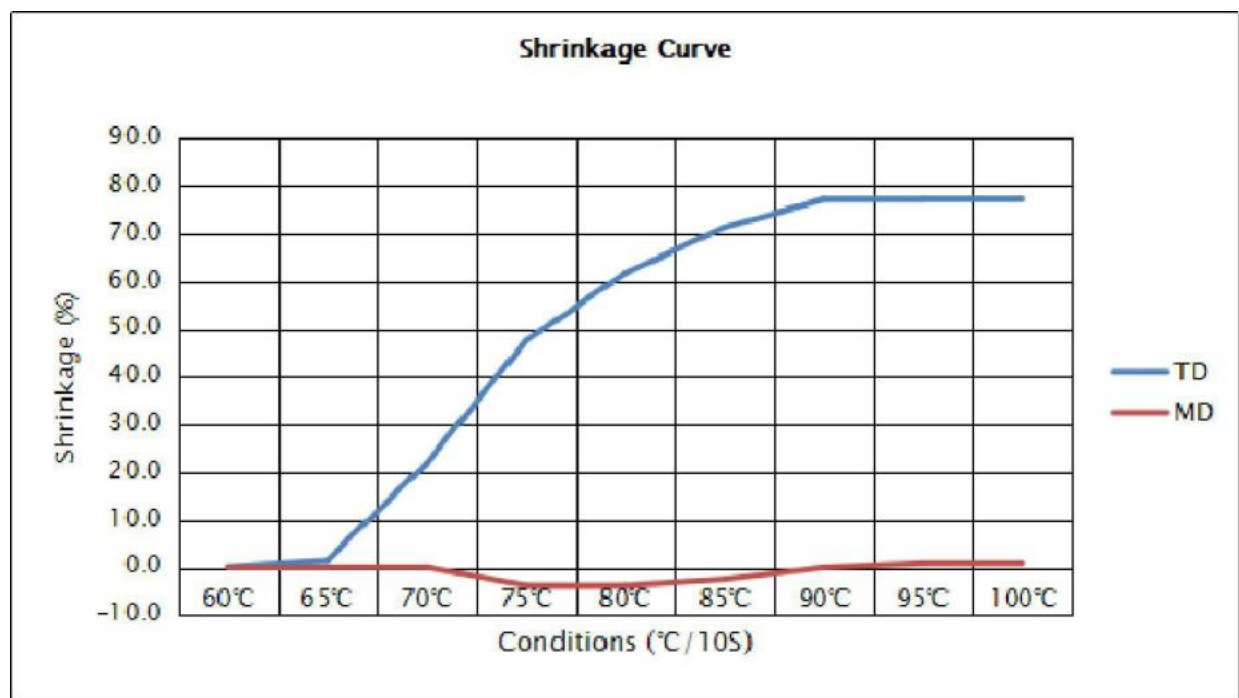

Shrinking Force Curve

