


东营嘉川商贸有限公司

Dongying Jiachuan Commerce and Trade Co. Ltd
 Add: Dongsu Road, Dongying Economic Zone, Dongying Shandong, China
 Tel:0086 546 757 1882 Email: info@dhfilmtech.com www.dhfilmtech.com

Product Name	White PET G shrink films	Type	B300
Surface Treatment	No	Thickness Range	40-45μm
Item			
		Unit	Test Method
Tensile strength	MD	MPa	ASTM D882
	TD		
Elongation	MD	%	
	TD		
Heat Shrinkage	MD	%	100°C/10S
	TD		Heating In Water Bath
Haze		%	ASTM D1003
Transmittance		%	
Gloss		%	GB/T 8807 (45°)
C.O.F(IN/OUT)		μs/μκ	ASTM D1894E
Wetting Tension		mN/m	ASTM D2578
Seaming Strength		N/15mm	SH FILMS Test Method 1,3 Dioxlane
Density		g/cm3	SH FILMS Test Method
			Value
			45
			200
			400
			35
			3.0
			69
			90
			10
			60
			0.50/0.40
			≥40
			6.00
			1.45

Shrinkage Curve

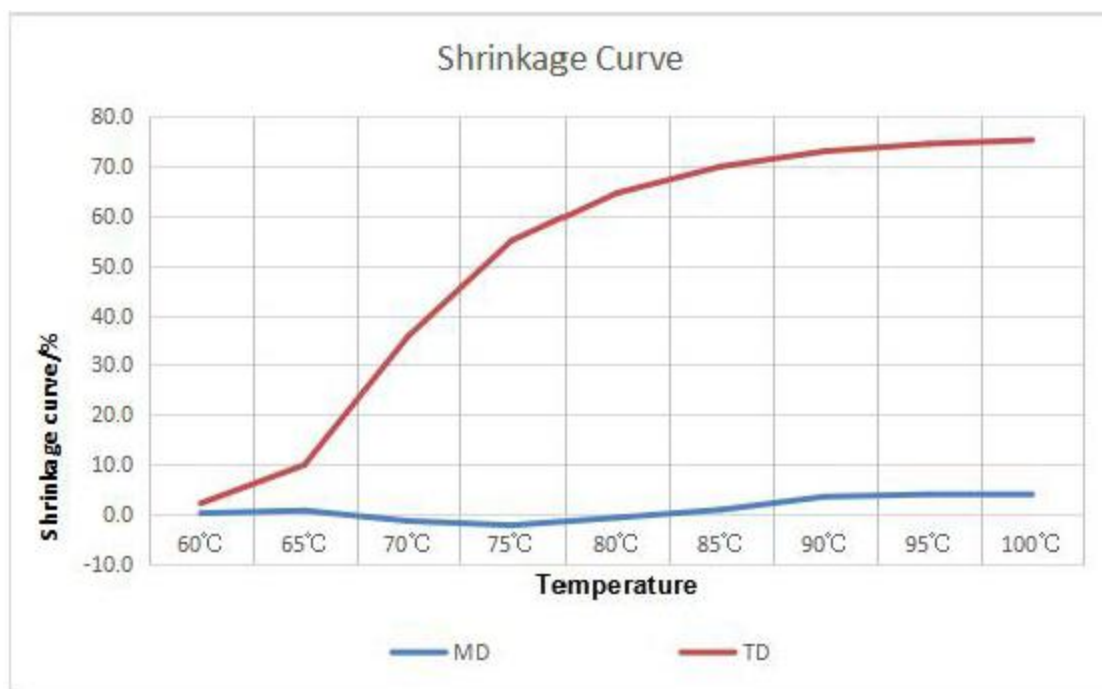

Shelf life:

12 months after production date under the below transportation or storage condition and better in the original package. If after 12 months you still have stock, please do the testing before use to ensure the quality. Any help to be needed, please feel no hesitate to contact us.

During transportation or storage, the environmental temperature should be no higher than 25°C, the environmental relative humidity no higher than 65% so refrigerated transport and thermal insulation and protection measures are suggested.

Reference: The data herein are for informational purpose only, and are true and accurate to the best of our scientific and technical knowledge.