


东营嘉川商贸有限公司

Dongying Jiachuan Commerce and Trade Co. Ltd
 Add: Dongsu Road, Dongying Economic Zone, Dongying Shandong, China
 Tel:0086 546 757 1882 Email: info@dhfilmtech.com www.dhfilmtech.com

| Item | Unit | Test Method | Value |
|------------------|--------|-----------------------------------------|-----------|
| Tensile strength | MD | ASTM D882 | 40 |
| | TD | | 200 |
| Elongation | MD | | 350 |
| | TD | | 30 |
| Heat Shrinkage | MD | 90°C/10S Heating In Water Bath | 6.0 |
| | TD | | 66.0 |
| Haze | % | ASTM D1003 | 90.0 |
| Transmittance | % | | 10.0 |
| Gloss | % | GB/T 8807 (45°) | 60 |
| C.O.F(IN/OUT) | μs/μκ | ASTM D1894E | 0.50/0.40 |
| Wetting Tension | mN/m | ASTM D2578 | ≥40 |
| Seaming Strength | N/15mm | SH FILMS Test Method 1,3 Dioxlane | 3.00 |

Shrinkage Curve

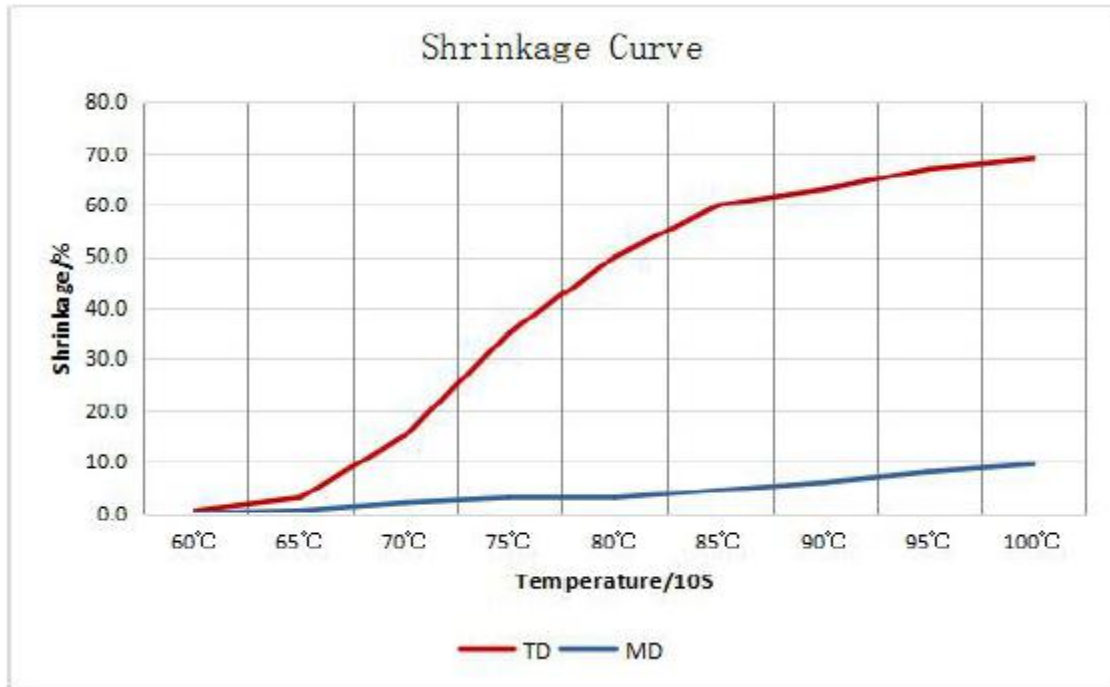

Shelf life:

12 months after production date under the below transportation or storage condition and better in the original package. If after 12 months you still have stock, please do the testing before use to ensure the quality. Any help to be needed, please feel no hesitate to contact us.

During transportation or storage, the environmental temperature should be no higher than 25°C, the environmental relative humidity no higher than 65% so refrigerated transport and thermal insulation and protection measures are suggested.

Reference: The data herein are for informational purpose only, and are true and accurate to the best of our scientific and technical knowledge.